

# N30 12G SDI FULL NDI® Codec

12G-SDI and NDI® bi-directional conversion



## Descriptions

NDI® (Network Device Interface) is an IP-based video transmission technology developed by NewTek (Vizrt). N30 12G SDI FULL NDI® encoder/decoder, end-to-end latency is ultra-low (less than 100ms), support for 12G-SDI video and NDI® bi-directional conversion. One unit, dual use.

It is a compact and small unit, either to a pocket or mounted on the camera equipped with standard 1/4" screw. N30 not only converts 12G-SDI Video to NDI® (Encoding) but also converts NDI to 12G-SDI (Decoding). It featured with big size Tally light, powered via PoE, DC or D-Tap (camera). What's more, it has a 3.5 mm audio headset interface, and support audio intercom (customization).

## Applications

- IP-based post production
- Video output to screen
- Low latency transmission
- Video conferences

## Advantages

### NDI encoding + decoding, one unit, dual use

- Plug in and play, 12G-SDI to NDI®, or NDI® to the screen;
- Equipped with 12G-SDI input and output dual interfaces, which can be looped out on the monitor during streaming, or output 12G-SDI signal during decoding;
- Preset 10 outputs, including 9 decoding addresses and 1 blank preset box (customizable background color), and USB extended keyboard for switching.



### High quality and low latency transmission

- Support single-link 12G-SDI video input and output both for encoding and decoding, backward compatible with SD/HD/VESA resolution and other special resolutions;
- Ultra-low latency, end-to-end latency is less than 100ms;
- FULL NDI high-quality encoding ensures excellent image quality, and lossless audio encoding ensures high-fidelity sound quality;
- Accurate clock and intelligent algorithm ensured video frame, image and audio synchronization.

### More advanced functions at your palm

- Built-in large-size Tally light to indicate PGM (program output) or PVW (pre-monitor output) status;
- Support for PoE (Power over Ethernet) and 5-18V DC input powered by USB, mobile power or camera battery;
- Equipped with 3.5mm headset interface, support voice intercom (customization).
- PTZ control with protocols of Visca/Visca over IP/Pelco (special PTZ control protocols can be customized);
- Integrated with IMS software to realize functions such as remote management and control, NDI stream management and distribution, centralized call management, and large-scale program production management;
- SDK/API provided for secondary development.

## Compatible software

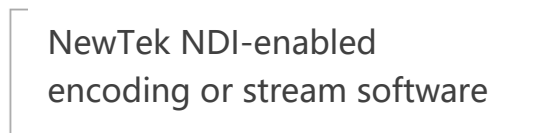

## Parameters

|                       |  |
|-----------------------|--|
| Model                 | N30  |
| Video input           | 1*12G-SDI  |
| Video output          | 1*12G-SDI (Loop or decoding output)                                  |
| Audio port            | 1*3.5mm  |
| Network               | 1*RJ45 1000Mbps Ethernet port (with PoE)                             |
| Video resolution      | Up to 1080p60 (backward compatible with SD/HD/VESA)                  |
| NDI® codec capacity   | 1*NDI® encoding or 1x NDI® decoding                                  |
| NDI®CODEC feature     | FULL NDI HD encoding, typical bitrate: 250Mbps@4K60 ,125Mbps@1080p60 |
| LED indicator         | Tally light, power light and status connection light                 |
| Power                 | PoE, DC, D-Tap (camera) optional. 5-18V wide range supported         |
| Voice intercom        | Customization  |
| PTZ control           | Customization  |
| DHCP                  | Support  |
| Management            | WEB page   |
| Dimension             | 110*95*23 mm (4.33*3.74*0.91" )                                      |
| Power consumption     | 6w   |
| Operating temperature | -20~40°C (Storage temperature: -20~70°C)                             |